



## Coil conveyor chain and slab transfer chain

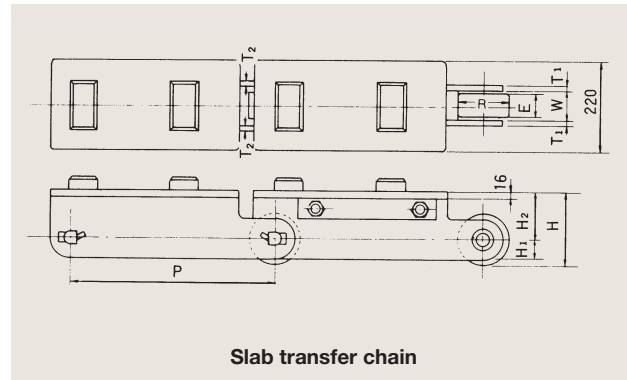

Chain No.	Pitch P (mm)	Roller		Inner width W (mm)	Pin outer Dia. D (mm)	Link plate thickness		Chain height			Average ultimate strength		Mass (kg/m)	Bearing rated load C/Co (kN)
		Outer Dia. R (mm)	Width E (mm)			T <sub>1</sub> (mm)	T <sub>2</sub> (mm)	H (mm)	H <sub>1</sub> (mm)	H <sub>2</sub> (mm)	(kN)	(kgf)		
HRP-Px 125φ × 60T	300	125	60	65	28.0	12.7	12.7	171.0	42.5	108.5	588	60000	88	157
	400												80	
	500												76	
HRP-Px 135φ × 90T	300	135	65	70	30.0	16	14	182.5	54.0	115.0	883	90000	108	216
	400												99	
	500												95	
	600												86	196
HRP-Px 150φ × 130T	300	150	70	76	38.5	16	14	195.0	62.0	120.0	1275	130000	119	281
	400												109	
	500												102	
	600												95	259
HRP-Px 150φ × 150T	400	150	70	76	38.5	19	16	195.0	69.0	120.0	1471	150000	118	281
	500												109	
	600												102	
HRP-Px 175φ × 180T	400	175	80	85	41.5	22	19	225.0	70.0	135.0	1765	180000	160	302
	500												148	
	600												138	
HRP-Px 180φ × 180T	500	180	90	95	45.0	22	22	225.0	70.0	135.0	1765	180000	177	410
	600												160	

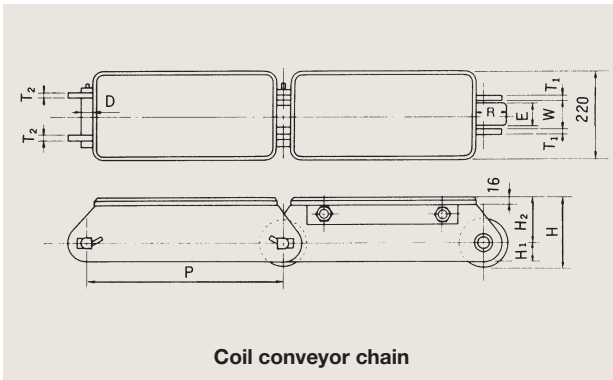